



STRATOS

AUTOMATIC ROLL-SLITTER WITH MOTORIZED BLADE


Automatic sturdy and affordable roll-slitter for industrial use.
It allows to slit up log rolls of different sizes to obtain narrow reels.

- > Sturdy roll-slitter designed to be durable and satisfy high performing jobs
- > Log rolls can be cut by setting the manual or automatic mode
- > Possible adjustments for automatic cutting mode: size and number of rolls to cut (visualisation of the cut rolls), mandrel speed, movement speed of the cutting unit, cutting penetration speed of the blade, programming (or exclusion) of the lubrication for blade
- > Settings: width of the log rolls to cut (up to 10 different widths cut programmable from narrow to wide slits)
- > 3 blade options: blade braked, free blade rotating, motorized blade
- > LCD touch screen display for a quick setting of machine functions

SUITABLE FOR:

- Adhesive films
- Plastic films
- Masking tapes
- Foam
- Application tape
- Double-sided tape
- Fabric
- Non woven
- Many more..




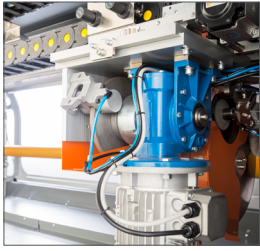

Compact cutting unit positioned at the top for easy cleaning of the working area



X and Y axis controlled by brushless motor system

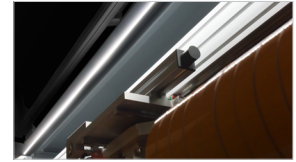


LED illumination in cutting area




Touch screen display



Pneumatic lifting and lowering of the mandrel to facilitate the loading and unloading of the log rolls and slit reels

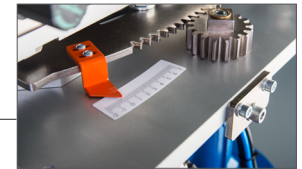

Adjustable blade angle

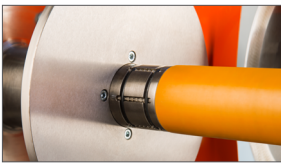

Full pneumatic automatic expansion of the mandrel to block the rolls on shaft



Adjustable sharpeners pressure




Adjustable blade sharpeners

STRATOS 320

STRATOS 400

Working width	1700 mm (67 in.)	1700 mm (67 in.)
Maximum roll height	1750 mm (69 in.)	1750 mm (69 in.)
Maximum external roll diameter	Ø 320 mm (13 in.)	Ø 400 mm (15,7 in.)
Rolls core	Ø 76 mm (3") and Ø 50 mm (2")	Ø 76 mm (3")
Blade (standard)	385 mm (15 in.)	510 mm (20 in.)
Speed of the mandrel and blade	from 0 to 600 rpm/min.	from 0 to 450 rpm/min.
Supply	400V (3P) - 50 Hz - 6000 W	400V (3P) - 50 Hz - 6000 W
Dimensions (W x D x H)	2740 x 1570 x 1640 mm (108 x 62 x 65 in.)	2740 x 1640 x 1760 mm (108 x 64 x 69 in.)
Weight	800 kg (1764 lbs)	1350 kg (2976 lbs)

Distributor




Manufactured in compliance with CE regulations



Follow us:



100% Made by FLEXA



100% Made in Italy

